

**JACK**

World No.1

# K6-A

## Ultra Efficient Interlock

15 seconds/pc , 2000 pcs/8h



Jack Facebook



YouTube

2023.09


**JACK TECHNOLOGY CO.,LTD**

ADD:No.1008, Donghai Avenue East, Jiao jiang District, Taizhou City,  
Zhejiang Province, China  
TEL:0086-576-88177782

E-mail: [sales@chinajack.com](mailto:sales@chinajack.com)  
[www.chinajack.com](http://www.chinajack.com)


## 1 Super fast, stable revenue increase of 50%

The sewing efficiency is increased by more than 50%. The machine body adopts dynamic self-balancing technology, with a factory speed of 5500 rpm and a maximum speed of 6200 rpm. Equipped with a high-performance motor, the sewing start brake responds quickly and can be operated freely.

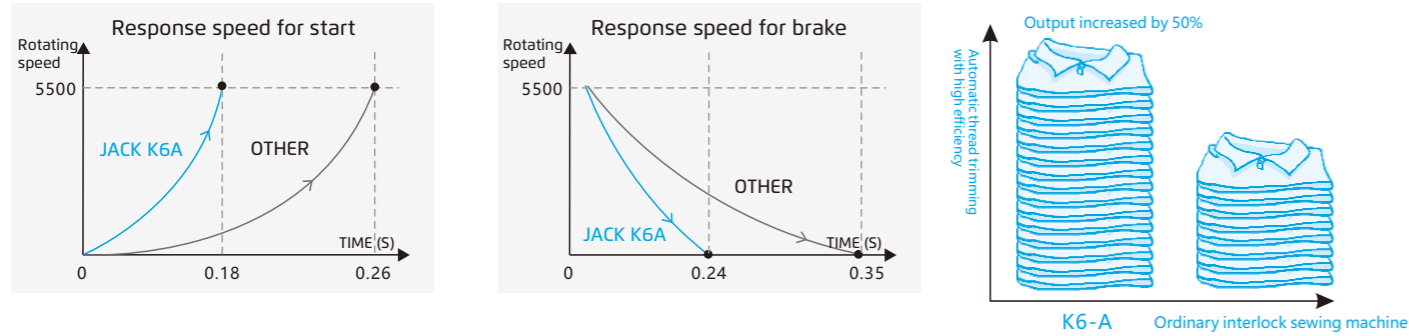


## 2 The sewing quality is high and you don't need to adjust the fabric when changing the fabric.

- The wire crossing adopts ceramic technology to ensure smooth lines and even stitches ;
- Adjustable thread amount passing system: equipped with a thread amount adjustment device, the size of the thread loop can be controlled to ensure that sewing does not skip stitches;
- Controllable high-precision looping needle technology: the looping needle does not shake and stitches do not skip during sewing.

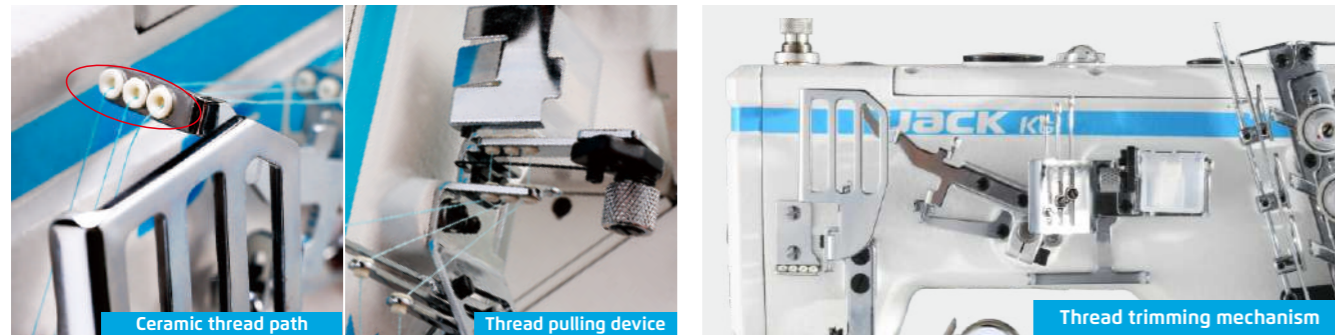

## 3 Stepper drive, thread trimming is faster and more durable

- The thread trimming is light, fast and stable, and the thread trimming defect rate is less than 3%, which greatly improves work efficiency. The height of the presser foot is adjustable in two levels, up to 9mm;
- It has a long service life, plug-and-play, and can save 3,000 yuan in maintenance costs. It has strong durability and does not have to worry about component damage affecting production progress.

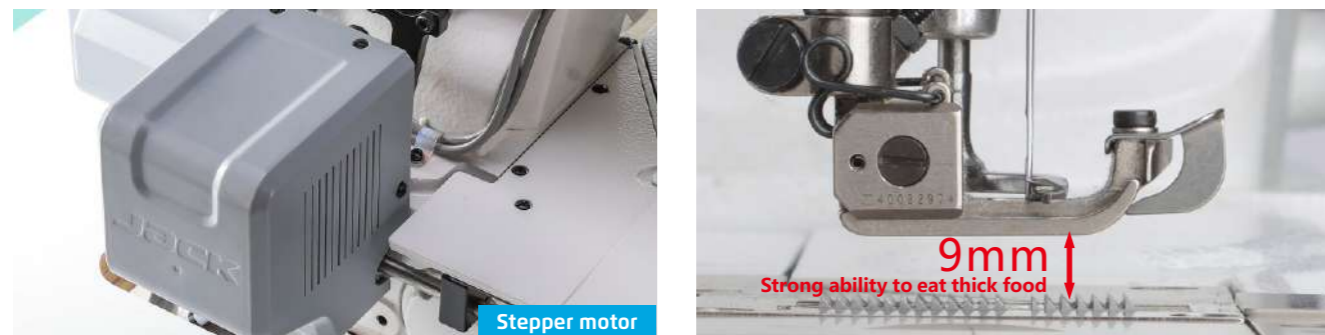

## 4 Easy to operate and fast to discharge materials

The diamond-shaped machine head unloads materials quickly, and the hand is only 2 centimeters away from the machine needle. At the end of sewing, the fabric will not be biased and the alignment will be accurate.



## 5 No oil stain, clean sewing

Black King Kong's super wear-resistant needle rod slider + sealed spcc high-density oil-proof oil seal effectively prevents machine oil from contaminating the fabric, making it clean and durable.



## Specification

Model	Needle Size	Needle Number	Thread Number	Needle Distance (mm)	Stitch Width (mm)	Foot Height (mm)	Default Speed (S.p.m)	Max Speed (S.p.m)	Step Motor Driving	Top Thread Trimmer	Thread Wipping	Volume (mm)	Weight (kg)
K6-A-UT-01GB(Plain Seaming)	11#/14#	3	5	1.5-4.5	5.6/6.4	0.6-1.8	9	6200	√	√	√	675*450*602	48/58
K6-A-UT2-01GB(Plain Seaming)	11#/14#	3	5	1.5-4.5	5.6/6.4	0.6-1.8	9	6200	√		√	675*450*602	48/58
K6-A-UT-35AC (left Cutter)	11#/14#	3	5	1.5-4.5	5.6/6.4	0.6-1.8	9	5500	√	√	√	675*450*720	52/65
K6-A-UT-01GB/PL-S2 (Rear Tug)	11#/14#	3	5	1.5-4.5	5.6/6.4	0.6-1.8	9	6200	√	√	√	675*450*602	48/58
K6-A-UT-01GB/CS (Encryption Seam)	11#/14#	3	5	1.5-4.5	5.6/6.4	0.6-1.8	9	6200	√	√	√	675*450*602	48/58
K6-A-UT-01GB/HG (Automatic hem folding)	11#/14#	3	5	1.5-4.5	5.6/6.4	0.6-1.8	9	6200	√	√	√	675*450*602	48/58

HG automatic fold down device can be added to pneumatic thread trimming.